

NovoSpeed BASIC



The Basic is Novoferm's standard rapid roll door for intensively used openings. Proven technology guarantees years of trouble-free operation. All aspects of the door are robustly designed and well-engineered in order to stand up to the rigours of intensive use.

Specifications

NovoSpeed	Basic
max. surface area (W x H)	20 m ²
max. width (W)	4000 mm
max. height (H)	5000 mm
opening speed	1 m/s
opening speed with frequency control	1.5 m/s
closing speed	1 m/s
closing speed with frequency control	0.5 m/s
door curtain weight	1400 gr/m ²
door curtain thickness	1.2 mm

Product Benefits

- class 1 wind resistance (up to 3 x 3 m)
- aluminium bottom beam with self-testing safety edge
- 'break-away' crash-protection system optionally available

1023

2009

3020

5002

7038

9003

9004

Reliable entry-level product

Good basis for intensive use

The Novo Speed Basic is the basic fast action roller door model for intensive use. In comparison with the Economic all aspects of the door are of a heavier and stronger design to allow intensive use. Specific features:

- robust steel guide side columns fitted with brush seals guide the door curtain
- the curtain is 1.2 mm thick
- standard vision section
- the sections are connected to each other by aluminium stiffener/hinge profiles
- aluminium bottom beam with rubber floor seal

Options

- completely transparent 'Full Vision' door curtain
- the aluminium lower beam is available with a 'break away' crash-protection system, which prevents damage in a collision and allows the door curtain to be repositioned in the guides without having to use special tools

Available control units:




T100R



T100R FU



T100R FU 3 kW

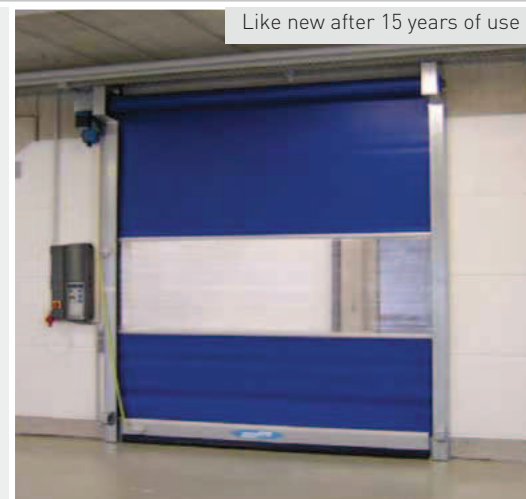

Like new after 15 years of use



Aluminium stiffener/hinge profile