

Series 13



Quality around the clock!

meta
Cubicles & Lockers

For wet areas

Type 13 RP



Type 13 RF



All versions made of 13 mm
HPL panels with black core.

Versions

Standard version


Round aluminium profiles

Type 13 RP

Height: 2030 mm
Clearance: 150 mm
Headroom: 1985 mm

or

Height: 2170 mm
Clearance: 150 mm
Headroom: 2125 mm

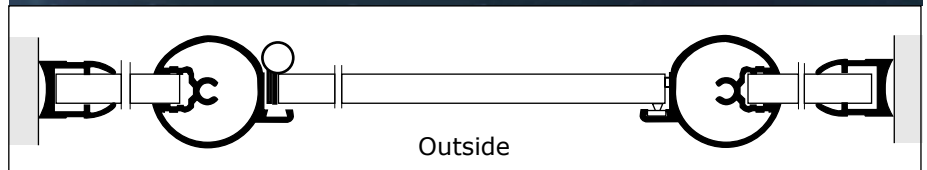

Square version


Square aluminium profiles

Typ 13 RF

Height: 2010 mm
Clearance: 150 mm
Headroom: 1990 mm

or

Height: 2150 mm
Clearance: 150 mm
Headroom: 2130 mm

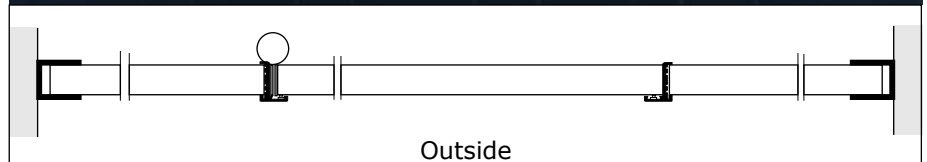

Versions

Floating version

Support legs are set back 150 mm

Height	RP	RF
Cubicle	2030	2010 mm
Clearance:	150	150 mm
Headroom:	1985	1990 mm
or		
Cubicle:	2170	2150 mm
Clearance:	150	150 mm
Headroom:	2125	2130 mm



Suspended version

An aluminium supporting profile, 160 mm high, ensures a span up to about 6 m without support legs

Height	RP + RF
Cubicle	2145 mm
Clearance:	150 mm
Headroom:	1985 mm
or	
Cubicle:	2285 mm
Clearance:	150 mm
Headroom:	2125 mm



Version without clearance

The cubicles are flush-mounted to the floor

Height	RP	RF
Cubicle:	2030	2010 mm
Headroom:	1985	1990 mm
or		
Cubicle:	2170	2150 mm
Headroom:	2125	2130 mm



Full height version and showers

Full height version

with panels made of same material as cubicles



Full height version

with plexiglas either transparent or ornamental. Other materials on request.



Showers

cubicle either with curtain, door or partition wall



Perfect design as standard 13 RP



3-roll stainless steel hinge




Aluminium profile 40 mm with nylon rosette



Powder-coated aluminium lock case



Hook and buffer

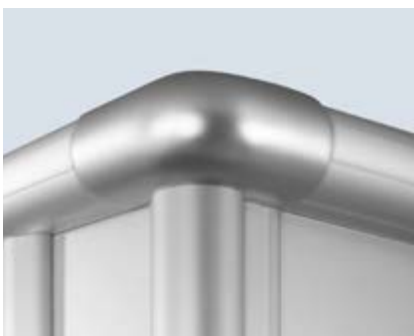

Corner joint standard version



Wall connection standard version



Section standard version



Section suspended version

meta quality standards without surcharge

- 3-roll stainless steel hinges
- Delta-Tone and Delta-Seal coating protect the spring inside the hinge from corrosion
- 12 colours for panels
- 7 colours for nylon parts
- 8 colours for profiles and stainless steel hinges
- TÜV-certified



13 RF



3-roll stainless steel hinge



Hook and buffer



Solid aluminium profile 20 mm with nylon rosette



Outside

Inside




Powder-coated aluminium lock case with nylon knob and red/white indicator



Cover profile standard version



Corner profile standard version




Extras in Nylon, Aluminium or Stainless steel

Nylon						
	Roll holder	Spare roll holder	WC-Symbols	Hook with buffer		
	Aluminium					
		Single handed lock RS4	Inside 13 RP	Inside 13 RF		
Stainless steel or aluminium						
	Single handed lock RS2 aluminium RS3 stainless steel	Hook aluminium or stainless steel	Buffer aluminium or stainless steel	Hook with buffer aluminium or stainless steel		
	Stainless steel					
		Rosette	Roll holder	Spare roll holder		
						
WC-symbols			Privacy screen holder			
			Toilet brush unit			

Colour chart

Standard colours

Sheets



90 white




70 grey




20 ivory




50 dove blue



40 sunny yellow




54 gentian blue



31 ruby red




77 graphite




95 aluminium



62 sea green



91 white pepper




71 grey pepper

Profiles and accessories



red



black



yellow




ultramarine



dark blue



grey



white



Aluminium anodized
(only profiles)

Technical Details 13 RP Standard version

This type is TÜV-certified and has the GS mark (tested for safety).

Height

2030 mm with 150 mm ground clearance, headroom 1985 mm
2170 mm with 150 mm ground clearance, headroom 2125 mm

Front Walls

13 mm HPL panels with black core, water-resistant, rough matte surface on both sides. All visible edges milled and bevelled.

An aluminium cover rail, 45 x 86 mm, passing complete front wall, guarantees a high stability.

Wall connection with rounded aluminium u-profiles, 22 x 30 mm.

Doors

Same materials as front walls, self closing. All edges radius 20 mm, all corners radius 9 mm. Door frame made of 45 mm diameter extruded aluminium. Rubber cushion on the lock side for silent closing.

Partitions

Same materials as front walls. All visible edges milled and bevelled. Wall and front connection with rounded aluminium u-profiles, 22 x 30 mm.

Support Legs

Powder-coated aluminium profiles, 40 mm diameter, with heavy-duty nylon rosettes, height-adjustable, concealed fixing to the floor, inserted into vertical profiles.

Hardware

Each door with 3 three-roll-hinges made of stainless steel with brass axle, thereof one spring hinge. Either polished or powder-coated in 7 colours without surcharge. Delta-Tone and Delta-Seal coating protect the spring inside the hinge from corrosion.

Powder-coated aluminium lock case with stainless steel latch and turn button with red/white indicator with emergency opening on the outside.

Accessories

Each cubicle with 1 nylon coat hook and a door buffer. Concealed fixing.

Colours for profiles

Anodized or powder-coated, available in 7 colours without surcharge. Supports for privacy screens are available only powder coated.

Colours for panels

12 colours available without surcharge.

Colours for nylon parts

7 colours available without surcharge.

Privacy Screens wall mounted

400 x 900 mm

Wall connection with four powder-coated support angles. Front corners with 100 mm radius.

13 mm version: same material as front walls.

Glass version: consisting of 2 pieces of glass with a matt foil in between.

Privacy Screens floor mounted

500 x 1850 mm

Same material as front walls.

Wall connection with four powder-coated support angles. Bottom of the screen fixed with support leg.



Environmental Protection

We do not use materials containing PVC or asbestos.

Type 13 RP is suitable for high demands in wet areas.

All cubicles are pre-fabricated for easy installation on site.

Technical Details 13 RF Standard version

This type is TÜV-certified and has the GS mark (tested for safety).

Height

2010 mm with 150 mm ground clearance, headroom 1990 mm
2150 mm with 150 mm ground clearance, headroom 2130 mm

Front Walls

13 mm HPL panels with black core, water-resistant, rough matte surface on both sides. All visible edges milled and bevelled.

An aluminium cover rail, 20 x 43 mm, passing complete front wall, guarantees a high stability.

Wall connection with aluminium u-profiles, 17 x 30 mm.

Doors

Same materials as front walls, self closing. All edges radius 10 mm, all corners radius 7 mm.

Aluminium door stop profile, 21 x 17,5 mm. Rubber cushion on lock side for silent closing.

Partitions

Same materials as front walls. All visible edges milled and bevelled. Wall and front connection with aluminium u-profiles, 17 x 30 mm.

Support Legs

Aluminium profiles made of solid material, 20 mm diameter, with heavy-duty nylon rosettes, height-adjustable, concealed fixing to the floor, bolted through the panel with panhead-screws M6 x 18.

Hardware

Each door with 3 three-roll-hinges made of stainless steel with brass axle, thereof one spring hinge. Either polished or powder-coated in 7 colours without surcharge. Delta-Tone and Delta-Seal coating protect the spring inside the hinge from corrosion.

Powder-coated aluminium lock case with stainless steel latch and turn button with red/white indicator with emergency opening on the outside.

Accessories

Each cubicle with 1 nylon coat hook and a door buffer. Concealed fixing.

Colours for profiles and hinges

Anodized or powder-coated, available in 7 colours without surcharge. Supports for privacy screens are available only powder coated.

Colours for panels

12 colours available without surcharge.

Colours for nylon parts

7 colours available without surcharge.

Privacy Screens wall mounted

400 x 900 mm

Wall connection with four powder-coated support angles. Front corners with 100 mm radius.

13 mm version: same material as front walls.

Glass version: consisting of 2 pieces of glass with a matt foil in between.

Privacy Screens floor mounted

500 x 1850 mm

Same material as front walls.

Wall connection with four powder-coated support angles. Bottom of the screen fixed with support leg.



Environmental Protection

We do not use materials containing PVC or asbestos.

Type 13 RF is suitable for high demands in wet areas.

All cubicles are pre-fabricated for easy installation on site.



meta

Trennwandanlagen

GmbH & Co.KG

meta Straße
D-56579 Rengsdorf
Tel. +49 26 34 / 66-0
Fax +49 26 34 / 66 450

www.meta.de
info@meta.de

Technical alterations of the illustrated products are subject to variation. Due to the printing technique colours may differ from the original.
13-01-38