

# Series 30

With  
laser  
edgebanding  
!




Quality around the clock!

**meta**  
Cubicles & Lockers

## For dry or wet areas

### Laser edgebanding

- Perfect look
- Better water and moisture resistance
- Welded by high performance laser with invisible adhesion joint
- Increased bonding results
- No gap between edgeband and panel
- Meets highest quality requirements
- Less insensitive to dirt

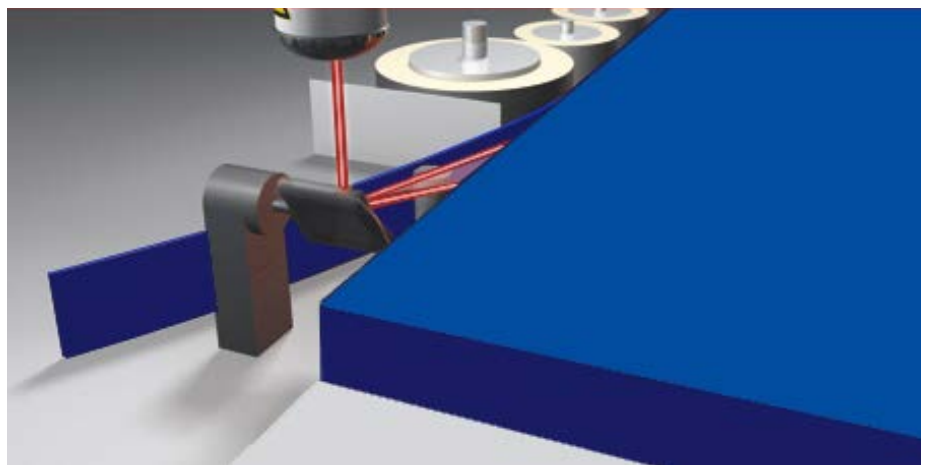

### Dry area

**30 mm chipboard faced with textured melamine resin on both sides. All visible edges with PP laser edgebanding.**

For normal use in dry areas.



### Wet area

**30 mm panels consisting of a 24 mm high-strength and water-resistant PU core with 3 mm HPL panels on both sides.**

For normal use in wet areas.



## Versions

### Standard version

Visible aluminium door stop profile


Dry area  
Type 30 RW

Wet area  
Type 30 NR

Height: 2015 mm  
Clearance: 150 mm  
Headroom: 1995 mm

or

Height: 2155 mm  
Clearance: 150 mm  
Headroom: 2135 mm

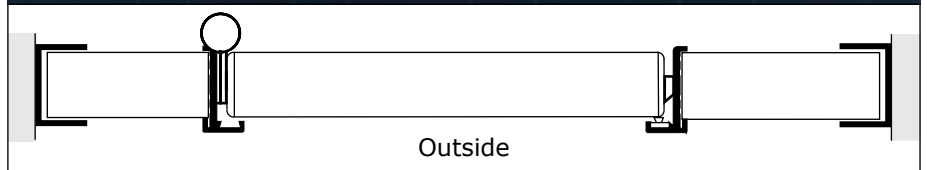

### Flush-mounted version

Embedded aluminium door stop profile invisible from the outside.


Dry area  
Type 30 FT

Wet area  
Type 30 FN

Height: 2015 mm  
Clearance: 150 mm  
Headroom: 1995 mm

or

Height: 2155 mm  
Clearance: 150 mm  
Headroom: 2135 mm

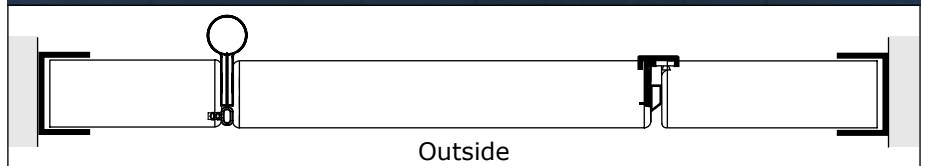

## Versions

### Floating version

Support legs are  
set back 160 mm

Height: 2015 mm  
Clearance: 150 mm  
Headroom: 1995 mm

or

Height: 2155 mm  
Clearance: 150 mm  
Headroom: 2135 mm



### Suspended version

An aluminium supporting  
profile, 160 mm high,  
ensures a span up to  
about 6 m without support  
legs

Height: 2155 mm  
Clearance: 150 mm  
Headroom: 1995 mm

or

Height: 2295 mm  
Clearance: 150 mm  
Headroom: 2135 mm



### Version without clearance

The cubicles are  
flush-mounted to the floor

Height: 2015 mm  
Headroom: 1995 mm



## Full height versions

### Full height version

with panels made of same material as cubicles



### Full height version

with plexiglas either transparent or ornamental.  
Other materials on request.



## Perfect design as standard

### meta quality standards without surcharge


- 3-roll stainless steel hinges
- 12 colours for panels
- 7 colours for nylon parts
- 8 colours for profiles and stainless steel hinges
- all visible edges with 3 mm PP-laser edgebanding
- TÜV-certified



3-roll stainless steel hinge



Aluminium profile 20 mm with adjustable nylon rosette

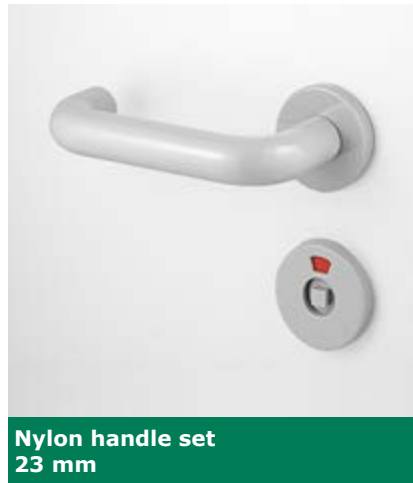

Nylon handle set  
23 mm



Hook and buffer



Corner joint



Wall connection


# Extras in Nylon, Aluminium or Stainless steel

Nylon						
	Roll holder	Spare roll holder	WC-Symbols	Hook with buffer		
	Aluminium					
		Single handed lock outside	Single handed lock inside			
Stainless steel or Aluminium						
	Handle set U-shaped	Handle set L-shaped	Hook	Buffer	Hook with buffer	
	Stainless steel					
		Single handed lock outside	Single handed lock inside	Rosette	Support angle privacy screen	
						
Roll holder		Spare roll holder	WC-symbols			

# Colour Chart

## Standard colours

### Sheets




90 white



70 grey



20 ivory




50 dove blue




40 sunny yellow




54 gentian blue




31 ruby red




77 graphite




95 aluminium



62 sea green



91 white pepper




71 grey pepper

### Profiles and Accessories



red



black



yellow



ultramarine



dark blue



grey




white



Aluminium anodized  
(only profiles)

## Special colours Type 30 RW and Type 40 FB

### Sheets



85 SG white  
Mirror Gloss




75 SG dark grey  
Mirror Gloss



413 Maple



270 Light Cherry



340 Noce Nero

Delivery time approx. 4 weeks.



# Technical Details 30 RW + 30 NR Standard version

**These types are TÜV-certified and have the GS mark (tested for safety).**

## Height

2015 mm with 150 mm ground clearance, headroom 1995 mm  
2155 mm with 150 mm ground clearance, headroom 2135 mm

**Type 30 RW:** 30 mm chipboard faced with textured melamine resin on both sides.

**Type 30 NR:** 30 mm panels consisting of a 24 mm high-strength and water-resistant PU core with 3 mm HPL textured melamine resin on both sides. Because of weight reasons partition walls are partly made of polystyrene.

## Front Walls

Panels either Type 30 RW or Type 30 NR. All visible edges with PP laser edgebanding (3 mm thick). An aluminium top profile, 43 x 20 mm, covers the entire length of the front wall to give additional stability. Wall connection with aluminium u-profiles, 33 x 30 mm.

## Doors

Same material as front walls. All edges with PP laser edgebanding (3 mm thick). All corners and edges radius 3 mm. Aluminium doorstop profile, 38 x 18 mm, with rubber cushion on the lock side for silent closing.

## Partitions

Same material as front walls. All visible edges on top and bottom with PP laser edgebanding (3 mm thick). Wall and front connection with aluminium u-profiles, 33 mm x 30 mm.

## Support Legs

Powder-coated aluminium profiles, 20 mm diameter, with heavy-duty nylon rosettes, height-adjustable, concealed fixing to the floor.

## Hardware

3-roll-hinges made of stainless steel, either polished or powder-coated in 7 colours without surcharge. Nylon handle set (23 mm dia). Inside the cubicle rosette with olive button, outside red/white indicator with emergency opening. Mortice lock with latch and bolt, rounded 20 mm.

## Accessories

Each cubicle with 1 nylon coat hook and a door buffer. Concealed fixing.

## Colours for profiles and hinges

Anodized or powder-coated, available in 7 colours without surcharge. Supports for privacy screens are available only powder-coated.

## Colours for panels

12 colours available without surcharge.

## Colours for nylon parts

7 colours available without surcharge.

## Privacy Screens wall mounted

400 x 900 mm:

Wall connection with four powder-coated support angles.

**30 mm version:** same material as front walls.

**Glass version:** consisting of 2 pieces of glass with a matt foil in between.

## Privacy Screens floor mounted

500 x 1850 mm:

Same material as front walls.

Wall connection with four powder-coated support angles.

Bottom of the screen fixed with support leg.



## Environmental Protection

We do not use materials containing PVC or asbestos.

Type **30 RW** for dry areas.

Type **30 NR** for wet areas.

All cubicles are pre-fabricated for easy installation on site.

# Technical Details 30 FT + 30 FN Flush mounted version

**These types are TÜV-certified and have the GS mark (tested for safety).**

## Height

2015 mm with 150 mm ground clearance, headroom 1995 mm  
2155 mm with 150 mm ground clearance, headroom 2135 mm

**Type 30 FT:** 30 mm chipboard faced with textured melamine resin on both sides.

**Type 30 FN:** 30 mm panels consisting of a 24 mm high-strength and water-resistant PU core with 3 mm HPL textured melamine resin on both sides. Because of weight reasons partition walls are partly made of polystyrene.

## Front Walls

Panels either Type 30 FT or Type 30 FN. All visible edges with PP laser edgebanding (3 mm thick). An aluminium top profile, 43 x 20 mm, covers the entire length of the front wall to give additional stability. Wall connection with aluminium u-profiles, 33 x 30 mm. Pilaster panels with more than 100 mm width with support leg.

## Doors

Same material as front walls. All edges with PP laser edgebanding (3 mm thick). All corners and edges radius 3 mm. Embedded aluminium doorstop profile, 21 x 17,5 mm. Rubber cushion on the lock side for silent closing.

## Partitions

Same material as front walls. All visible edges on top and bottom with PP laser edgebanding (3 mm thick). Wall and front connection with aluminium u-profiles, 33 mm x 30 mm.

## Support Legs

Powder-coated aluminium profiles, 20 mm diameter, with heavy-duty nylon rosettes, height-adjustable, concealed fixing to the floor.

## Hardware

3-roll-hinges made of stainless steel, either polished or powder-coated in 7 colours without surcharge. Nylon handle set (23 mm dia). Inside the cubicle rosette with olive button, outside red/white indicator with emergency opening. Mortice lock with latch and bolt, rounded 20 mm.

## Accessories

Each cubicle with 1 nylon coat hook and a door buffer. Concealed fixing.

## Colours for profiles and hinges

Anodized or powder-coated, available in 7 colours without surcharge. Supports for privacy screens are available only powder-coated.

## Colours for panels

12 colours available without surcharge.

## Colours for nylon parts

7 colours available without surcharge.

## Privacy Screens wall mounted

400 x 900 mm:

Wall connection with four powder-coated support angles.

**30 mm version:** same material as front walls.

**Glass version:** consisting of 2 pieces of glass with a matt foil in between.

## Privacy Screens floor mounted

500 x 1850 mm:

Same material as front walls.

Wall connection with four powder-coated support angles.

Bottom of the screen fixed with support leg.



## Environmental Protection

We do not use materials containing PVC or asbestos.

Type **30 FT** for dry areas.

Type **30 FN** for wet areas.

All cubicles are pre-fabricated for easy installation on site.

# Good reasons to buy our products


## Highest quality

Our products meet your requirements - Quality made in Germany.



## Latest technology

We are the only company in our business that uses laser for edgebanding.

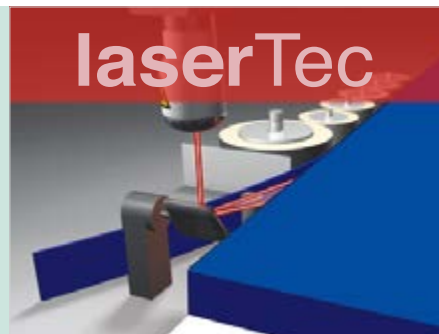

## High Tech

We produce with most modern machinery.



## Fast and reliable

Due to production time 6 days a week 24 hours a day all your orders will be delivered in time.



## Competitive prices

We offer you good prices.





# **meta**

## **Trennwandanlagen**

GmbH & Co.KG

meta Straße  
D-56579 Rengsdorf  
Tel. +49 26 34 / 66-0  
Fax +49 26 34 / 66 450

**[www.meta.de](http://www.meta.de)**  
**[info@meta.de](mailto:info@meta.de)**

Technical alterations of the illustrated products are subject to variation. Due to the printing technique colours may differ from the original.  
30-01-39