

# NovoSpeed

## FLEX 2.0 | HARD EDGE



The NovoSpeed Flex **Hard Edge** an electrically operated rapid roll door for the retail sector, general industry and commercial and industrial buildings. The Flex is neatly finished and combines high speed with low noise.

### Specifications

NovoSpeed	Flex Hard Edge
max. surface area (W x H)	20 m <sup>2</sup>
max. width (W)	4250 mm
max. height (H)	5000 mm
opening speed	2 m/s
closing speed	0.5 m/s
door curtain weight	1400 g/m <sup>2</sup>
door curtain thickness	1.2 mm

### Product Benefits

- class 0 wind resistance
- self-supporting construction
- 100% self-resetting in both directions
- a safety light curtain is standard

1023 2009 3020 5002 7038 9003 9004

## Attractive, fast and silent

### Universal solution

The Novo Speed Flex is an interior door for universal use in industry. The door is fast and strikingly silent in operation. An industrial drive unit integrated in the roller keeps the side space requirement to a minimum. The advanced control panel is equipped with frequency control as standard, offering many functions and connection possibilities.

#### Presence detection


An active light curtain is supplied to a maximum height of 2500 mm. When the door is open, the safety light curtain detects both moving and stationary objects in the opening and prevents the door from closing.

This new generation of Novo Speed Flex is equipped with two extension springs for door curtain balancing, resulting in a considerably extended service interval.

**Options:** see page 13 for details of all the options offered for the NovoSpeed Flex.



Standard control unit: T100R FU

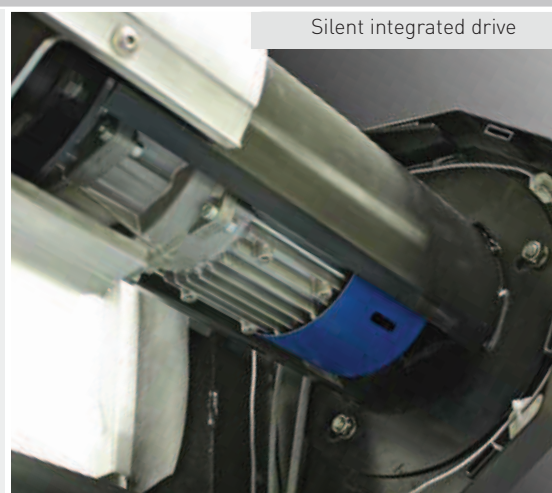

Silent integrated drive

Option 1



Open-Stop-Close

Option 2



Mechanical emergency release